

IMPORTANT

Product with French certificate
A+

Product with German certificate
AgBB

ANTICO SYSTEM

0,01 % V.O.C.

Create the look of an aged floor.

Unique professional wood-ageing system

Water-based - without ammonia

Numerous creative possibilities

Only for professional use*

Basin[®]
Products for success

*The use of this product requires the necessary knowledge and experience and can therefore only be used by recognized professionals.

THE ANTICO RANGE – REACTIVE COLOURING SYSTEM

OPTIONAL FIRST LAYER	FIRST LAYER	SECOND LAYER	THIRD LAYER
BLACK ACTIVATOR AD-70701	ANTICO 1 AD-70705	ANTICO 3 AD-70709	PATINA WHITE AD-8275D
Activator to intensify reactions	Ageing agent	Bleaching agent	Reactive Patina White



5L or 25L

Black Activator is an optional first layer. When you apply it before Antico 1, it produces a darker result or can be used to make burned wood effects.

Consumption: 60 gr/m²

Drying time: 2 to 3 hours

Application: with a spraying gun or with a specific brush.

Remark: Black Activator can also be used to obtain a normal reaction on oak that contains little tannin acid. Therefore it is important to carefully apply the product. A spraying gun offers the best result.



5L or 25L

First layer and most prominent product of the Antico system. This product reacts with the tannin acid in the oak and gives a dark blue-grey effect after drying. This hue intensifies if you use Black Activator beforehand.

It is possible to dilute Antico 1 with water to obtain a lighter hue.

Examples:

Mix of 50 % Antico 1 + 50 % water.

Mix of 25 % Antico 1 + 75 % water.

Consumption: 60 gr/m²

Drying time: 2 to 3 hours

Application: with a spraying gun or brush.



5L or 25L

Second layer. With this new bleaching agent, one can obtain the most interesting hues. This product eliminates the dark blue-grey of Antico 1 and gives an aged effect. With the application of a third layer Patina White, an extraordinary reaction will occur that gives a wonderful grey or brown hue to the oak.

Consumption: 60 gr/m²

Drying time: 2 to 3 hours

Application: with a spraying gun or brush.




2,5L or 10L

Patina White is a third layer. This product reacts with the Antico system and creates a chalked effect. Apply this product and let dry the surplus. It forms a white film on the wood, after drying. This should be wiped off with a sanding pad or sponge to obtain the desired transparency.

Consumption: 60 gr/m²

Drying time: 2 to 3 hours

Application: with a spraying gun or brush.

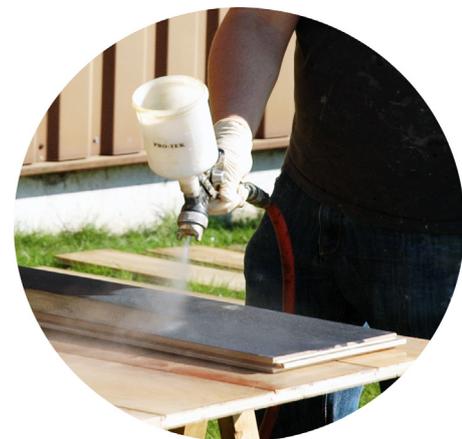

The Antico system is a reactive system producing an aged look when reacting with the tannin acid in the wood. Antico products only colour the wood and do not offer any protection. **It is important to know that Antico products do not contain colouring agents or dyestuff.** The hue can only be obtained through the reaction with the wood. That's why these hues look so interesting and give a beautiful colour palette to each shelf. The hue obtained depends of the type of wood, the wood preparation, the application method, the quantity of applied product, the humidity and temperature during the treatment (that can change the drying time and reaction). In all cases, we recommend to work under normal circumstances (between 15 and 25 °C and 40 - 70 % humidity) and take some tests in order to obtain the desired hue.

Application

Antico products are water-based and therefore very liquid. For industrial application, we recommend the use of a spraying machine. **In all cases, one may never mix Antico products with one another, to avoid hazardous reactions.** Don't let the jerry-can open for too long. The products may lose their action due to this. Avoid touch with metal (use a plastic stick to stir).



Finishing products

Finishing possibilities

There are many possibilities to finish Antico treated wood. However, to efficiently protect the astonishing grey hue (obtained with the Antico System), it is recommended to use the 'Finishing products' in combination with the appropriate Basin primer.

NC-21250 Invisible primer solvent-based



5L or 25L

The special primer NC-21250 is the only product that can maintain the unique grey hue of the Antico. This product contains very clear resins and must be well-stirred before use. On top of that, 2 layers of a 2 component water-based varnish from Basin are applied.

HBN-08700 Isolation Primer water-based



5L

This water-based primer maintains the hue of the dark Antico combinations as much as possible.

Primer NC-21250

- Extra matt gloss:
no Visible 2 comp. HPC-5007 + PUR-1010
- Matt gloss:
Protect HD-4008 + PUR-1020
- Satin gloss:
Lumina HD-6008 + PUR-1030

Isolation Primer HBN-08700

- Extra matt gloss:
no Visible Nuance HPC-5009 + PUR-1010
- Matt gloss:
Protect HD-4008 + PUR-1020

Progressive scheme





Riga grey




Warsaw brown



Tirana brown



Prague grey

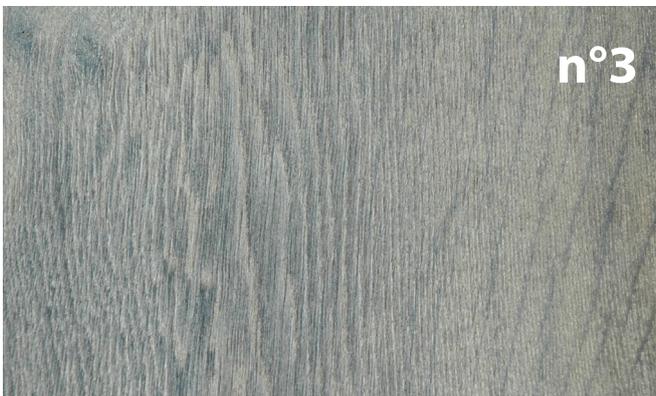

Berlin grey



Oslo brown

Due to the versatility of the products, application possibilities and application processes, this information is only given with the purpose to inform. It is highly recommended to check by yourself prior to performing the final works. Our experience has taught us that every user develops his own way of working. This information was provided, verbal or written, on the explicit demand of the client. This information is given in good faith and based on the current experience of Basin. There can not be inferred, by any means, any responsibility on behalf of Basin Chemie N.V.

Prices can change - the technical datasheets can be modified by Basin Chemie at any time without preceding inform - Basin Chemie is not responsible for results caused by incorrect use of the product & instructions such as e.g. quantities, timing, choice of material, temperature, subsoil, influence of light etc.

ANTICO SYSTEM

Create the look of an aged floor.

For more information, technical advice or to order product samples, you can always contact us via our e-mail info@basin.be, our website www.basin.be or by phone +32 51 65 00 10.